

**WIDE RANGE**



# WR FEEDER

Friction Sheet Feeder

WR FEEDER is a friction feeder for sheets, cards, cases, and coupons up to a maximum size of 250x300 mm. in the 250 version or 400x300 mm. in the 400 version or 500x300 mm. in the 500 version. Thanks to its powerful stepper motor, it can reach a feed speed up to 70 meters/minute.

The feed selection uses rubber counter-rotating rollers with micro adjustments on both the left and right side, which make the feeder extremely flexible for any type of product.

The 300-mm high, large capacity tray with minimum load control ensures great autonomy.

WR FEEDER can be equipped with an HP inkjet marker for variable data such as date, time, bar codes, and texts up to a maximum height of 12.7 mm at a 300 dpi resolution.



**WR FEEDER 400**

# WR FEEDER


Friction Sheet Feeder

## WR FEEDER LABEL


WR FEEDER LABEL is a system for feeding and labelling cartons and bags at a speed of up to 40 meters per minute. An encoder allows perfect synchronism between the peeling speed and the distribution speed of the labels, guaranteeing high labelling accuracy at any speed. The collection collector available in the version with manual adjustments or with automatic adjustment by motorization with programmable descent allows an orderly collection of the products.



## **WR FEEDER 500**

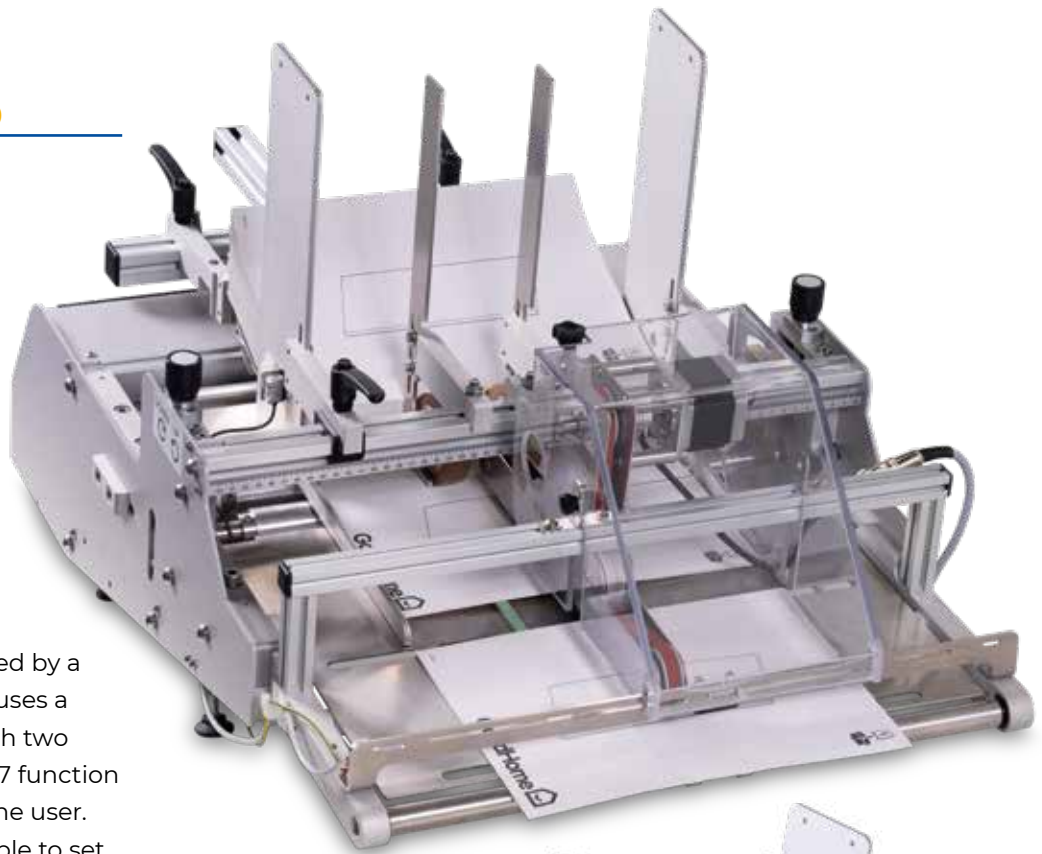

WR FEEDER is controlled by a microprocessor which uses a LCD display keypad with two 20-character rows and 7 function keys to interface with the user. Through this, it is possible to set all the working parameters, such as continuous feed or multiple copies on demand, feeding speed, stop delay, print delay and stroke counter. It has enough memory for up to 40 different work settings. During operation, the state of the machine can be displayed, including end-of-production warning or stop reason, e.g. empty loader or jammed paper.

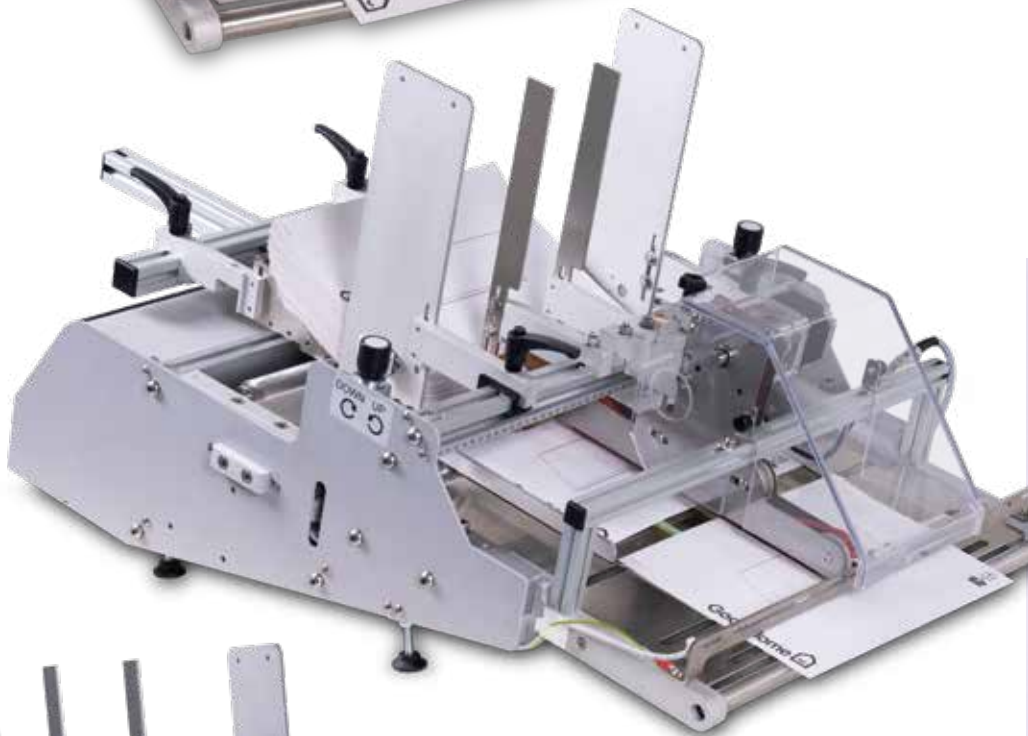

## **WR FEEDER 400**

## **WR FEEDER 250**





The L and XL versions allow the processing of very long products and/or the insertion of several printers and labelling heads.

### **WR FEEDER 500 XL**




| Technical features | WR FEEDER 250         | WR FEEDER 400         | WR FEEDER 500         |
|--------------------|-----------------------|-----------------------|-----------------------|
| Products width     | min. 60 - max. 250 mm | min. 60 - max. 400 mm | min. 60 - max. 500 mm |
| Products length    | min. 60 - max. 300 mm | min. 60 - max. 300 mm | min. 60 - max. 300 mm |
| Products thickness | 0,2-10 mm             | 0,2-10 mm             | 0,2-10 mm             |
| Feeding speed      | max. 70 metres/min    | max. 50 metres/min    | max. 40 metres/min    |
| Drive              | stepper motor         | stepper motor         | stepper motor         |
| Power supply       | 230 Vac - 50 Hz       | 230 Vac - 50 Hz       | 230 Vac - 50 Hz       |
| Power consumption  | 300 W                 | 300 W                 | 300 W                 |
| Dimensions         | 840 x 413 x 490 (H)   | 840 x 563 x 490 (H)   | 840 x 663 x 490 (H)   |
| Weight             | 35 Kg                 | 40 Kg                 | 45 Kg                 |

# WR FEEDER

Friction Sheet Feeder

## WR FEEDER 250 / 400 / 500

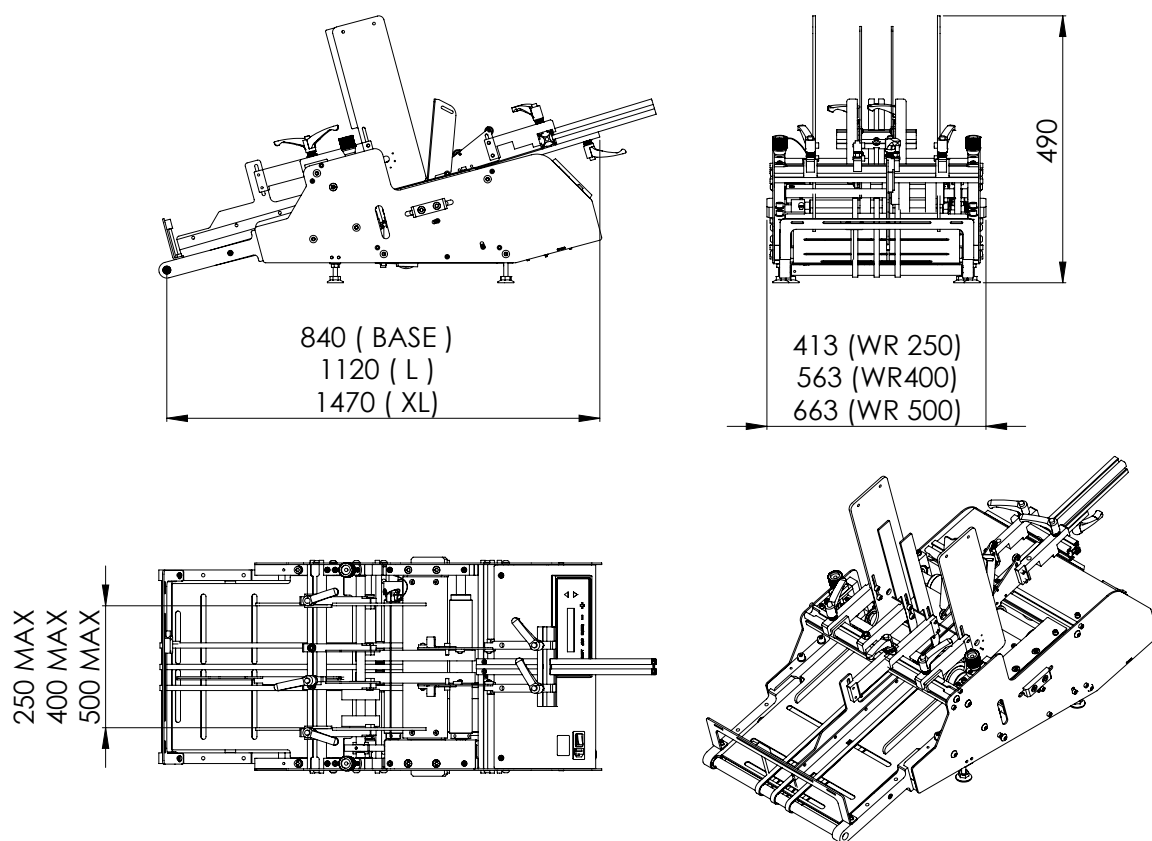

**WIDE RANGE**



Schur Automation a/s  
Fuglevangsvej 41, 8700 Horsens  
Tel. +45 79 28 29 28  
[www.schur.com](http://www.schur.com) - [marking@schur.com](mailto:marking@schur.com)